



WE ARE BUILDING A BETTER HARVEY

Integrity . Unity . Pride

Christopher J. Clark, Mayor
CITY OF HARVEY

Addendum 1

Bid Number: 2022-09-02

CDBG Number: 2006-065

For

FAIRFIELD AVE AND WASHTENAW AVE IMPROVEMENT PROJECT

Date of Bid Advertisement: September 12, 2022

Addendum 1 Date of Issue: September 20, 2022

Bid Due Date: September 27, 2022

Time: 9:59am Central Time

City of Harvey

15320 Broadway Avenue

Harvey, IL 60426

Phone: 708-210-5300

Email: procurement@cityofharveyil.gov

FAIRFIELD AVE AND WASHTENAW AVE IMPROVEMENT PROJECT

Addendum 1

Summary of Addendum 1:

1. Response to Contractor Questions enclosed.
2. Project is Unit Price and will be paid on the actual quantity constructed.
3. Appendix C: Bid Form quantities have been revised.
4. Appendix D: Project Location Map has been revised.



WE ARE BUILDING A BETTER HARVEY

Integrity . Unity . Pride

Christopher J. Clark, Mayor
CITY OF HARVEY

Response to Contractor Questions

Bid Number: 2022-09-02

CDBG Number: 2006-065

For

FAIRFIELD AVE AND WASHTENAW AVE IMPROVEMENT PROJECT

Date of Bid Advertisement: September 12, 2022

Response to Contractor Questions Issued: September 20, 2022

Bid Due Date: September 27, 2022

Time: 9:59am Central Time

City of Harvey

15320 Broadway Avenue

Harvey, IL 60426

Phone: 708-210-5300

Email: procurement@cityofharveyil.gov

FAIRFIELD AVE AND WASHTENAW AVE IMPROVEMENT PROJECT

Response to Contractor Questions

1. When does the project have to be completed?

By 12/31/2022.

2. Will the Contractor be responsible for moving vehicles within the construction area?

No, the City will be responsible for coordinating relocation of vehicles within the construction area.

3. Only the roadway travel lane will be improved?

Yes. The roadway travel lane is approximately 26' wide.

4. Are the parking areas adjacent to the roadway travel to be improved?

No.

5. What is required for erosion control?

Inlet protection and ditch checks if any storm structures or ditches are encountered within the right-of-way.

6. What is full depth pavement removal?

Full Depth Pavement Removal has been removed from the scope of work and the Bid Form has been revised.

7. Are the MBE and WBE percentages in the Bid Package a goal or requirement?

Goal.

8. Where are Thermoplastic Pavement Markings being used?

Intersection crosswalks. The Bid Form has been revised with updated Thermoplastic Pavement Marking quantities.

9. Is there a chance that the budget for this work will not cover all the items?

Strategies for addressing potential shortfalls in funding will be done once the bids are received.

APPENDIX C. BID FORM

Addendum 1


Item no.	Description	Unit	Quantity	Unit Price	Total
1	HOT-MIX ASPHALT SURFACE REMOVAL, 4"	SQ YD	3955	\$	\$
2	PREPARATION OF BASE	SQ YD	3955	\$	\$
3	HOT MIX ASPHALT SURFACE COURSE, MIX "D", N50, 1.5" (IL-9.5mm)	TON	336	\$	\$
4	HOT MIX ASPHALT BINDER COURSE, IL-19.0, N50, 2.5", 1 LIFT	TON	561	\$	\$
5	BITUMINOUS MATERIALS (TACK COAT)	GAL	396	\$	\$
6	BITUMINOUS MATERIALS (PRIME COAT)	GAL	1384	\$	\$
7	THERMOPLASTIC PAVEMENT MARKING - LINE 24" (WHITE)	LF	208	\$	\$
8	TRAFFIC CONTROL	LSUM	1	\$	\$
9	EROSION CONTROL	LSUM	1	\$	\$
10	ENGINEERING DESIGN	LSUM	1	\$	\$
Other*				\$	\$
Other*				\$	\$
Other*				\$	\$
Other*				\$	\$
Other*				\$	\$
Other*				\$	\$
Total:					\$

*Contractor may specify any additional pay items necessary to complete the project. Use additional sheets if needed.

BID NUMBER: 2022-09-02
CDBG NUMBER: 2006-065

Appendix C. Bid Form



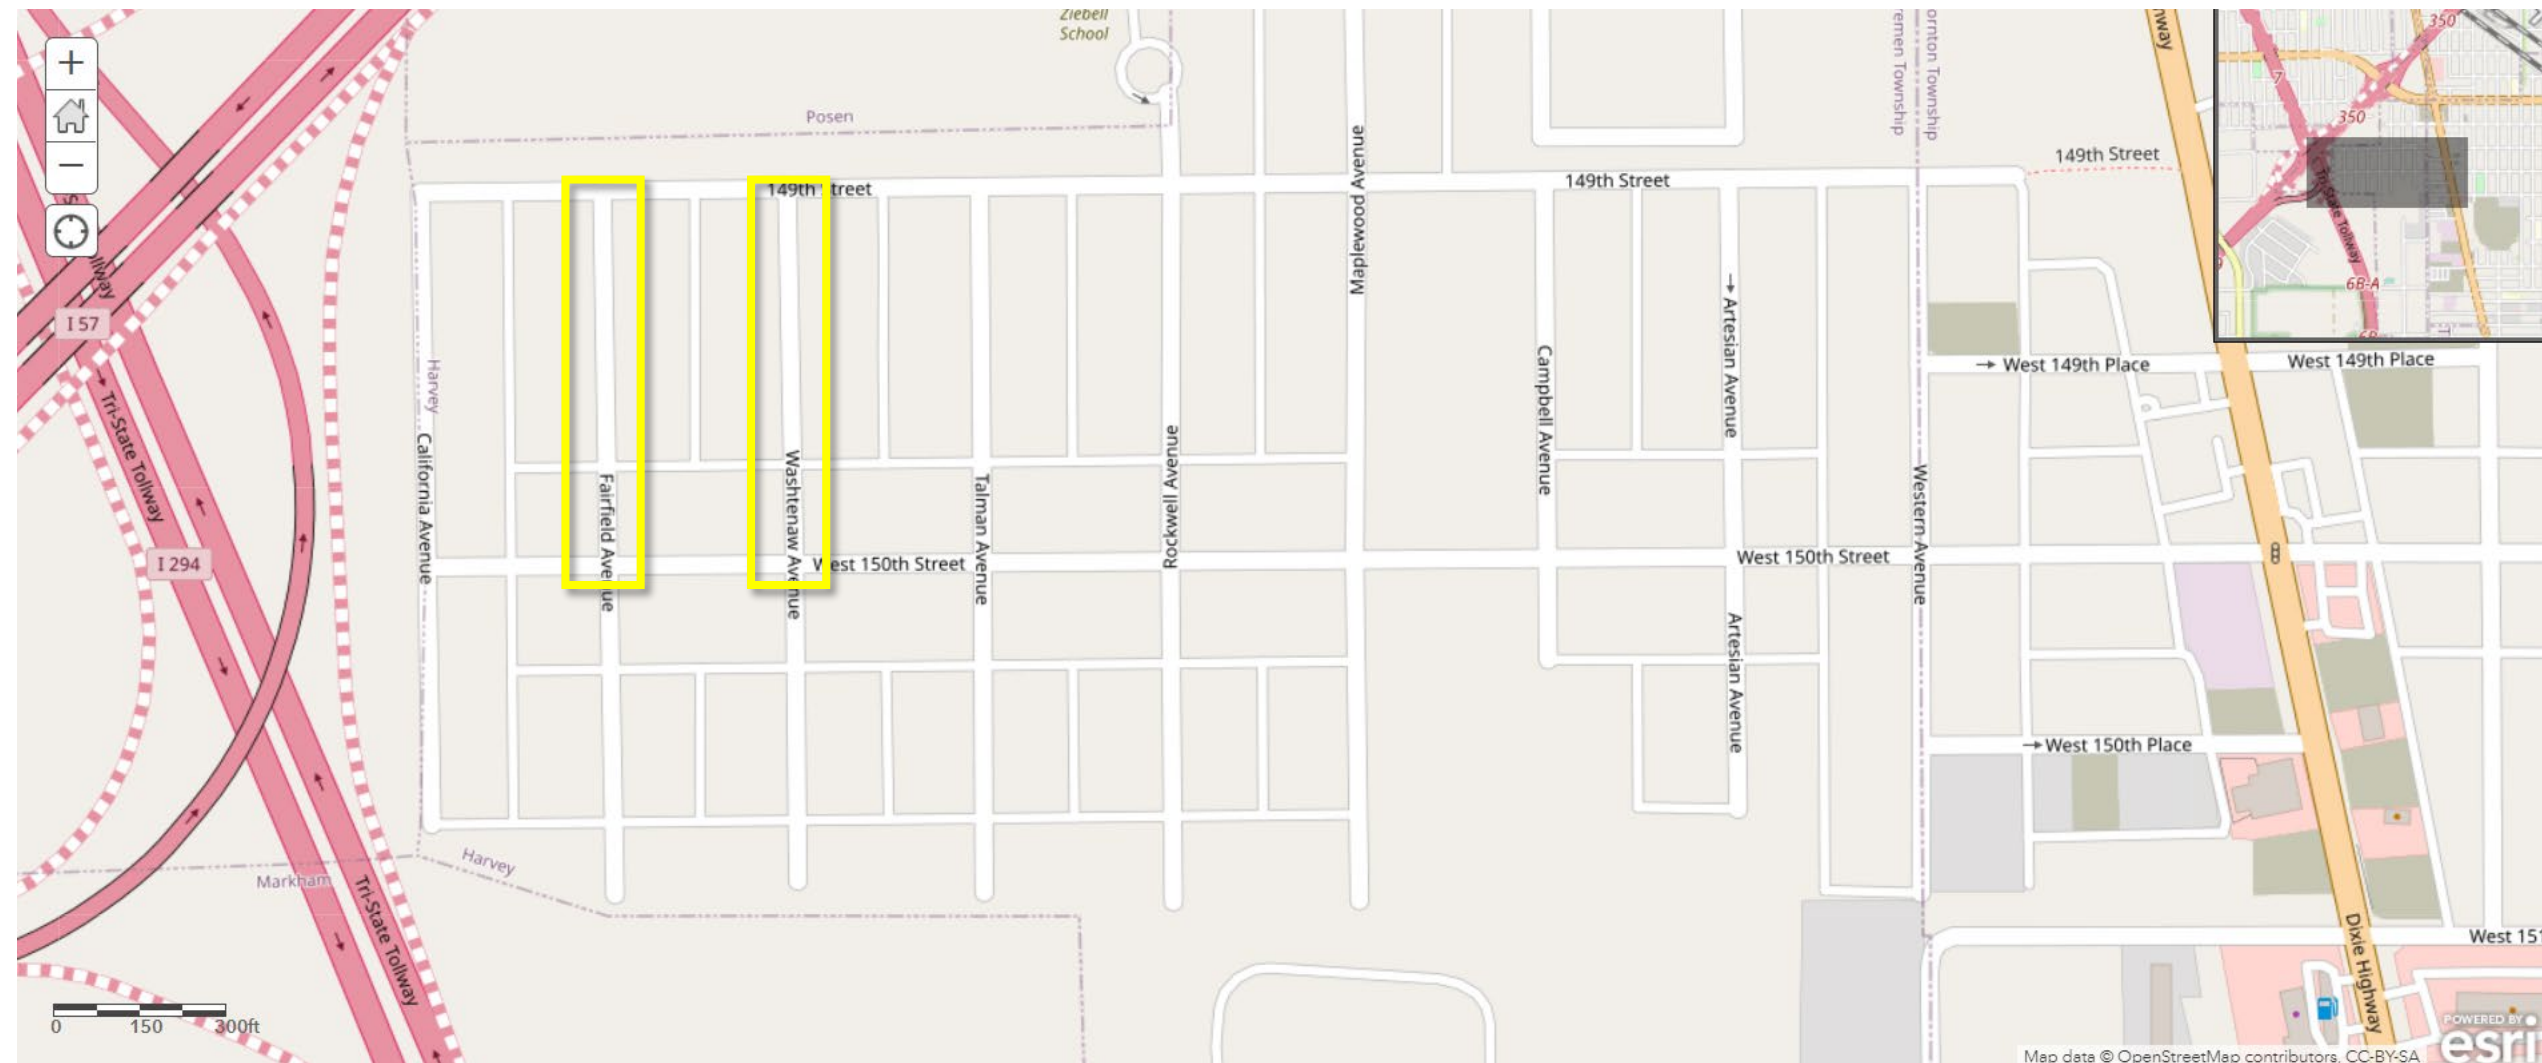

Project Location